



Avid MediaCentral® | Cloud UX v2018.9

Hardware Guide

Important Information

For the latest information on Avid MediaCentral Cloud UX, see the documentation available from the MediaCentral Cloud UX [Documentation](#) page of the [Avid Knowledge Base](#). Updates are occasionally issued after initial release.

This document is intended for people who either need to advise or directly make purchase decisions for hardware on which MediaCentral Cloud UX (MCUX) will be installed and configured. A basic understanding of server components (CPU, RAM, etc.) is required.



This document provides HP and Dell part numbers as a reference. Part numbers might change without notification. Consult the manufacturer directly for updated information.

Revision History

Date Revised	Changes Made
March 25, 2019	Increases the minimum amount of RAM detailed in “ Determining Scale: Newsroom Management Only ” on page 9.
November 6, 2018	Removed reference to the Broadcom network daughter card in the Dell PowerEdge R640 specifications as this adapter is not supported with Avid shared storage and led to confusion when reviewing the system specifications.
October 11, 2018	Clarification made to “ Determining Scale: Newsroom Management Only ” on page 9.
September 28, 2018	First Publication <ul style="list-style-type: none">Includes qualification of the Dell PowerEdge R640.

Contents

Overview	2
Memory Requirements	4
Networking Requirements	5
Caching and HDD Requirements	6
Over-Specifying and Under-Specifying the Hardware	7

Deploying Multiple Servers	8
Adding Servers to an Existing Installation	8
Determining Scale: Newsroom Management Only.....	9
Determining Scale: Asset Management Only	9
Determining Scale: Production Management or Mixed Workflows.....	11
Determining Scale: Media Composer Cloud Remote.....	16
Avid Qualified Servers	18
Legal Notices.....	27

Overview

Before getting into the details of buying hardware, you should take a moment to learn more about MediaCentral Cloud UX. This will help you understand why it is important to make the right hardware purchasing decisions.

After reading this document you should be able to:

- Clearly identify the workflows in which you will use MediaCentral Cloud UX
- Determine the general hardware platform you need to buy
- Determine the type of network interface card (NIC) required for your environment
- Determine whether or not you require additional hard drives for media caching

What is MediaCentral Cloud UX?

Avid MediaCentral Cloud UX provides a simple, user-friendly graphical interface that can integrate with MediaCentral modules such as MediaCentral Production Management, MediaCentral Asset Management, and MediaCentral Newsroom Management. You can access the Cloud UX user interface from anywhere in the world through a web client or mobile device.

Beyond the user interface, MediaCentral provides a platform for additional apps, modules, and services that can be leveraged by other connected systems — extending workflows and creating new collaborative solutions. To learn more about MediaCentral Cloud UX, see the following guides on the Avid Knowledge Base:

- *Avid MediaCentral | Cloud UX User's Guide*
- *Avid MediaCentral | Cloud UX Install Guide*
- *Avid MediaCentral | Cloud UX ReadMe*

Operating System

MediaCentral Cloud UX is supported on a community-driven, command-line based operating system called CentOS (Community Enterprise Operating System) — derived from the sources of Red Hat Enterprise Linux (RHEL). Unlike RHEL, you are not required to purchase a support subscription to be licensed to use CentOS. The operating system is supplied by Avid as part of the MediaCentral Cloud UX installation media.

For more information about CentOS, see <https://www.centos.org/about/>.



For information on supported CentOS versions, see the [MediaCentral Cloud UX Compatibility Matrix](#) on the Avid Knowledge Base.

Buying Hardware for MediaCentral Cloud UX

For the most part, provisioning hardware is straightforward in that it is easy to configure a basic supported server. However, varying workflows and optional video playback methods can add complexity to the hardware provisioning process. Take the time to determine the hardware options with which the server might need to be equipped. Review the following deployment options and associated supported server types:

- MediaCentral Production Management workflows are supported on qualified HP and Dell hardware only. Media Composer Cloud Remote workflows are also only supported on qualified HP and Dell hardware.

For more information, see [“Avid Qualified Servers”](#) on page 18.

- MediaCentral Asset Management workflows are supported on HP, Dell, and other hardware vendors.
- MediaCentral Newsroom Management workflows that do not require video playback are supported on HP, Dell, and other hardware. In some cases Newsroom-only workflows can be deployed on systems with fewer system resources than workflows that include media playback.

In all cases, it is recommended that you review your hardware assessment with a qualified Avid representative before making a final purchase. Reviewing this document is an essential first step prior to consultation that will accelerate the process.

Server Requirements at a Glance

A number of factors might affect your hardware purchasing decision:

1. **Deployment Scale:** The type of deployment is the primary influence on server requirements. A Newsroom Management only deployment without video playback has the lowest processing needs. MediaCentral Production Management and MediaCentral Asset Management deployments require more CPU resources, due to the media transcoding requirements.
2. **Media Formats:** The next biggest consideration is the source media format. For example, DNxHD is a resource-intensive media format while Avid JFIF is lightweight in comparison.
3. **Frame-based vs File-based Playback:**
 - The default playback method for MediaCentral Cloud UX is frame-based. In this mode, media is encoded as a series of JPEG files that are streamed directly from the server for playback. This technique provides frame-accuracy and a smooth transition between cuts. Frame-based playback is high quality, but requires increased network bandwidth when compared to file-based playback.
 - For MediaCentral Asset Management systems, the MAM Desktop and MAM Cataloger both use file-based playback. In this mode, media is encoded as a series of FLV files that are downloaded to the client workstation for playback.

When playing MediaCentral Asset Management assets through a web browser, the media is streamed to the user using the frame-based workflow.

4. **Number of Users:** The number of expected number of users and how those users connect to the system (desktop web client vs mobile device) might affect the hardware specifications.

The following table summarizes the basic cases for single-server and cluster configurations. For more information, see “[Deploying Multiple Servers](#)” on page 8.

Number of Servers	Deployment Model	Description
1	Single Server	<p>The minimum deployment model, suitable for MediaCentral for Newsroom Management-only (browse and edit content with no media playback requirement) or environments with few users and / or undemanding transcoding requirements.</p> <p>This solution offers some hardware redundancy (dual power supplies, dual internal drives), but little redundancy for system services.</p>
3 +	Cluster	<p>This solution offers redundancy for both hardware and system services.</p> <p>Adds increased peak-usage and media transcoding capacity.</p> <p>Deploying multiple servers in a cluster is particularly important for sites with many users and/or resource-hungry media formats.</p> <p>For example, a single server can support the simultaneous playback of over 100 Avid JFIF media streams, but only 15 streams of AVC Intra 50 to MediaCentral Cloud UX.</p>

Hewlett-Packard (HP) and Dell

Consult the manufacturer’s web site for the most up-to-date for resources for researching and configuring the servers supported for MediaCentral Cloud UX.

- HP (Enterprise) website (US):
<https://www.hpe.com/us/en/home.html>
- Dell (Enterprise) website (US):
<http://www.dell.com/us/business/p/enterprise-products>

For more information on specific servers, see “[Avid Qualified Servers](#)” on page 18.

Memory Requirements

MediaCentral Cloud UX servers require a minimum of 128GB of RAM. If desired, more RAM can be added to the server to potentially support additional users or steam counts.

Networking Requirements

Avid supports the on-board 1 Gb network adapter in many HP and Dell servers. However, certain workflows require the increased bandwidth of a 10 Gb network adapter. For example, a 10 Gb connection is required for any MediaCentral Cloud UX deployment that intends to use 100+ Mbps video formats such as AVC-I 100, DVCPro 100, and DNxHD 145. 10 Gb connections might also be desired or required to enable increased client connections or playback streams.

For more information on supported network adapters used with Avid shared storage, see the following links on the Avid Knowledge Base for Avid ISIS or Avid NEXIS documentation:

- http://avid.force.com/pkb/articles/en_US/User_Guide/Avid-NEXIS-Documentation
- http://avid.force.com/pkb/articles/en_US/User_Guide/Avid-Storage-Documentation

Zone Recommendations

You can connect to Avid shared storage using a 1 Gb or greater connection in Zone 1, Zone 2, or Zone 3. A Zone 3 connection is recommended for all configuration types.

- **Zone 1:** Connected through a 1 Gb or 10 Gb port (direct connect). This configuration option applies to ISIS 7500 and ISIS 5500 systems.
- **Zone 2:** Connected through a 1 Gb or 10 Gb port on an Avid qualified layer-2 switch (non-routed).
- **Zone 3:** Connected to an Avid qualified layer-3 switch (routed) with known Quality of Service (QoS); traffic routed to Avid shared storage (one hop). ISIS 7500 systems should be load-balanced across ISIS VLANs (approximately a 60/40 ratio).

MediaCentral Production Management

In this workflow MediaCentral Cloud UX decodes the source media format on Avid shared storage and streams images and sound to the clients. This workflow requires a connection to an Avid shared storage system.

Zone 1, Zone 2, or Zone 3 (recommended) connections are supported.

MediaCentral Asset Management

In this workflow MediaCentral Cloud UX provides playback of video assets registered as browse proxies by Asset Management. The zone is determined by the location of the browse proxies:

- For non-Avid storage, the network connection is at the user's discretion as long as it is 1 Gb or better.
- For Avid shared storage, Zone 1, Zone 2, or Zone 3 (recommended) connections are supported.

MediaCentral Newsroom Management

Newsroom Management-only deployments do not require a connection to a storage system as there is no video playback component. The network connection is at the user's discretion as long as it is 1 Gb or better.

Caching and HDD Requirements

In several workflows, MediaCentral Cloud UX generates and locally caches transcoded media assets. These workflows include:

- Working with multi-cam assets from a MediaCentral Production Management system
- Media Composer Cloud Remote workflows using multi-cam media
- MediaCentral Asset Management workflows that require file-based playback

These workflows all share the same requirement: asset playback from a web application is requested of a source media asset that is not web compliant. In this case MediaCentral Cloud UX must locally generate a web compliant copy of the source media asset. This asset is then served to the requesting application. The asset is also cached in anticipation of a subsequent playback request. In the case of multi-server deployments (a cluster), the cached assets are replicated across the servers to reduce future transcoding of the same asset on a different playback server.

As a result, additional drives are required on MediaCentral Cloud UX servers for this cached media.

Media Cache Drive Configuration

When a media cache is required, the following options are supported for the cache volume:

Drives	Volume Configuration and Notes
1	A single hard drive configured as a separate volume. This configuration provides no redundancy in case of hard drive failure.
2	2 drives configured as a RAID1 volume. This configuration provides redundancy in case one of the hard drives fails.
6 or 8	Drives configured as a RAID5 volume. This configuration provides redundancy in the event of hard drive failure. It also provides increase I/O for a higher volume of proxy generation and serving.

Important: In all cases, the media cache is distinct from, and in addition to, the 2 HDD RAID1 volume configured for the operating system.

The cache drives can be sourced directly from HP/Dell as part of your server requisition. The following drives, their equivalent, or better are recommended:

Supplier	Description
HP	HP 450 GB 6G SAS 10K SFF (2.5-inch) SC Enterprise 3 yr Warranty HDD
Dell	600 GB 10K RPM SAS 6 Gbps (2.5-inch) Hot-plug Hard Drive

Over-Specifying and Under-Specifying the Hardware

Over-Specifying Hardware

If you need to provision a system for a large number of users or high-density media formats (e.g. AVC-I 50/100), you might want to obtain a more powerful server that would be more appropriate for these workflows. Over-specifying hardware is supported in all cases.

Customers can provision additional RAM, and faster, more powerful CPUs to get increased capacity from their MCUX server. It should be understood, however, that Avid has not measured server capacity in these cases. We can only say that more concurrent streams will be supported, but we cannot specify how many.

Under-Specifying Hardware

In some cases a price-sensitive customer that requires a deployment with fewer users or playback streams might want to provision a more cost effective server because they do not need the capacity of the servers specified in this document. Under-specifying hardware is supported in *some* cases.

- **MediaCentral (Newsroom Management only):** For more information, see [“Determining Scale: Newsroom Management Only” on page 9.](#)
- **MediaCentral (with playback):** All deployments must provision no less than the following specifications:
 - 2x Intel Xeon E5-2650 8-core 2.0 GHz (2.0GHz/8-core/20MB/95W) CPU
Intel Xeon E5-26xx v3 or later required for all configurations
 - 128 GB of RAM
- **MediaCentral (for Asset Management):** In cases where not many connections are required, a single processor (minimum 6-core) and 24GB of RAM can be provisioned. Consult Avid product management.

If your configuration allows for under-specified hardware, adhere to the following rules regarding CPU & memory allocation:

- **CPU:** Sandy Bridge (v1) and Ivy Bridge (v2) CPUs must be a non-energy saving model (e.g. a performance model). Certain approved Haswell (v3) and later processors are exempt from the non-energy saving restriction.
- **RAM:** For each core, 4 GB RAM must be installed. For example:
 - 1 x 6-core CPU x 4 GB RAM = 24 GB RAM
 - 2 x 4-core CPU x 4 GB RAM = 32 GB RAM
 - 2 x 6-core CPU x 4 GB RAM = 48 GB RAM
 - 2 x 8-core CPU x 4 GB RAM = 64 GB RAM
 - 2 x 12 core CPU x 4 GB RAM = 96 GB RAM

If you under-specify your hardware configuration, you might experience negative system performance. This could result in reduced FPS (frames per second) during playback, delayed response time for the user interface, or system instability as the services fight for under-provisioned system resources.

Deploying Multiple Servers

The resolutions and playback methods available through MediaCentral Cloud UX have very different CPU and I/O footprints. Therefore, determining the number of servers required for a given installation can be challenging. The two factors that determine the quantity of servers required for a MediaCentral Cloud UX deployment are *redundancy* and *horizontal scale*.

Redundancy

Each MediaCentral Cloud UX deployment requires at least one server. However, in most cases Avid recommends deploying three or more servers to obtain high-availability and service redundancy.

So, the first question you have to answer when trying to determine how many servers are needed is:

Is high-availability required?

- If no, then one server might be sufficient. Additional servers are required if concurrent usage peaks are not satisfied by the playback capacity of a single server.
- If yes, then three or more servers are required. Additional servers are required if concurrent usage peaks are not satisfied by the playback capacity of the first three nodes.

Each MediaCentral Cloud UX server is identified as a *node*. In a cluster configuration, you can have Master nodes, Worker nodes, or a node that fills both roles. Master nodes are responsible for coordinating activities across the cluster. Worker nodes are generally more passive in that they run pods, but do not manage them. Nodes that are identified as both a master and a worker have enough resources to both coordinate activities and run pods. In a MediaCentral Cloud UX cluster, the first three servers operate as both Master and Worker nodes. All other nodes are simply worker nodes. **When creating a MediaCentral Cloud UX cluster, Avid requires a minimum of three cluster nodes. Two node configurations are not supported.**

Horizontal Scale

The playback services are the most CPU and memory intensive component of the system. They are designed to run on all servers in the cluster such that playback sessions are distributed, or load-balanced, across all servers. This allows for horizontal scale—adding servers in a cluster to accommodate increased capacity.

Adding Servers to an Existing Installation

Over time, an organization might wish to expand a single server to a cluster configuration or potentially add nodes to an existing cluster. When making a purchase, the organization might not be able to obtain server hardware that matches the specifications of the original hardware. Avid supports mixing server hardware for a cluster configuration as long as the following criteria are met:

- Mixed processor speeds and RAM are supported between the servers. However, all servers should meet the [“Memory Requirements” on page 4](#).
- RAID1 (OS) and RAID5 (cache) drive sizes do not need to be identical between the old and new servers. If the new servers include larger drives, some space will be left unused. In other words, if the RAID5 cache volume is 2TB on the original hardware and is 3TB on the new hardware, 1TB will be left unused.

- The network interface card does not need to be of the same type, but the name of the interface must be the same. For example, the naming convention for the network adapters in an HP server is “ethx”, while Dell servers use “emx” and “pxp1”. When creating or expanding a cluster, special care and additional steps are required to ensure that all NICs have the same interface name.

For more information, see “Renaming the Primary Network Interface” in the *Avid MediaCentral / Cloud UX Installation Guide*.

- While mixing 1 GB and 10 GB network adapters between the servers is possible, it is not recommended. Avid has not specifically tested clusters containing a mix of 1 GB and 10 GB adapters.
- Mixed server generations are supported. For example, an HP Gen 9 server and an HP Gen 10 server are supported together in the same cluster.

Determining Scale: Newsroom Management Only

If you configure MediaCentral Cloud UX with only the MediaCentral Newsroom Management module, video playback is not invoked by this configuration. In this case the CPU and memory requirements are reduced. Hardware for this configuration need only meet the following minimum requirements:

- Processors: Your server must include CPU’s with a total minimum of four cores. Avid recommends quad-core Intel Xeon CPU @ 1.8 GHz or higher.
- Memory: 4GB of RAM per core, but not less than 64GB of RAM.

If you plan to use the MediaCentral Cloud UX Publish app, you must install at least 128GB of RAM.

Your MediaCentral Cloud UX server can be obtained from any vendor. Qualified HP or Dell servers are not required.

Determining Scale: Asset Management Only

MediaCentral Cloud UX can be leveraged as a player for the MAM Desktop application in MediaCentral Asset Management systems. In this case the MCUX user interface might be accessed only for certain administrative tasks and not by a larger user base. MediaCentral Cloud UX provides playback of different video asset formats registered as a browse proxy in the Asset Management database and residing on standard file system storage or proprietary storage that provides a standard system gateway. For each playback request, MediaCentral Cloud UX does one of the following:

- Frame-based playback. MCUX decodes the proxy and streams images and audio to the remote web-based client. This playback mode is the same one used by MediaCentral Cloud UX, and is required in Asset Management for growing file workflows and variable speed playback. This is the most CPU intensive playback mode.
- File-based playback (native). MCUX serves the proxy file as is to the remote web-based client. This playback mode requires that the proxies be a format that Flash can play natively, i.e., MP4-wrapped H.264 / AAC or FLV. This is the least CPU intensive playback mode.

- File-based playback (alternate). MCUX decodes the proxy and transcodes it to a cached FLV, which is subsequently served to the remote web-based client. This playback method occurs when file-based playback requests are made of proxy formats that cannot be played natively by Flash. This playback method has a one-time CPU hit on initial playback request for each asset, but it subsequently very light because the same cached file is served.

Unlike MediaCentral Cloud UX, playback in MediaCentral Asset Management is very rarely I/O bound. Most Asset Management deployments are on a network that can sustain many, many playback requests.

For example, MediaCentral Asset Management can be configured to enable 20 users to use frame-based playback and 1000 users to use only file-based playback. Even then, the system's proxy repository might be a mix of formats — only some of which can be played natively by the MediaCentral Cloud UX server.

Typically the MediaCentral Cloud UX servers specified in this document can:

- Support ~120 frame-based playback streams (growing files) of most Asset Management proxy formats. (Variable speed playback reduces the number of streams per server by ~50%.)
- Concurrently transcode ~50 alternate proxy formats to FLV. Because the transcode process is a one-time hit per asset, this usually translates to ~120 concurrent users per server.
- Serve ~4000 H.264 proxy files (provided there is enough outbound network connectivity and proxy storage disk I/O).
- Process ~30 video analysis requests.

General Project Information

Avid Sales and Product Management are generally consulted for each MediaCentral Asset Management deployment. In some cases (very small deployments), a smaller, less expensive server specification will be recommended (fewer, lower frequency cores, less RAM).

Having answers to the following questions will help Avid Product Management assess the project:

1. Provide a brief description of the project with specific goals.
2. Does the project require high-availability?
This is separate from adding servers to accommodate capacity.
3. Will known servers (HP or Dell) be utilized or are custom servers from a specific vendor be procured?
If a custom server is desired, you might be asked to provide detailed specifications of the target server.
4. On which storage solution and/or file system are the proxies stored?
If the storage system is proprietary, please indicate the standard file system gateway through which MCUX will mount it (e.g., Omneon MediaGrid via CIFS).

For each registered browse proxy format, answer the following questions:

1. What is the proxy format?
This relates to the file container and the codecs used for video and audio essences.
2. What is the expected peak of concurrent streams for this format?

For example, there may be 100 users, but only 25 users at any given time will be working with assets using this proxy format.

3. Do users of this format require playback of growing files?

Only MPEG-1 and Sony XDCAM Proxy formats are supported for this workflow.

4. How many streams of variable speed playback are required?

MediaCentral Asset Management can provision permission to use variable speed playback. As it is a CPU intensive playback method, it should only be provisioned to users who really need it.

5. What is the maximum video image resolution?

For example, 720x406 pixels.

6. What is the maximum proxy bit rate?

For example, 3.0 Mbps.

Determining Scale: Production Management or Mixed Workflows

This section details how the video resolution can affect the system performance and the number of users that can connect to the server. Although this section is focused on MediaCentral Production Management workflows, your configuration might also include integration with MediaCentral Newsroom Management, or other workflows.

To determine the number of servers you need to support your deployment of MediaCentral Cloud UX, you need to know the following information:

- Which media formats are in use (e.g. DNxHD 145, XDCAM50, H.264 800Kbps proxy)?
- How many users (peak usage) are expected for each format?
- Interface through which MCUX is connecting to Avid shared storage (1 Gb or 10 Gb)?
- Do you require a clustered configuration?
 - At minimum, three servers provide cluster capability for service or hardware failures.
 - $(n + 1)$ An additional server that allows for peak expected capacity even if one server fails.

About Video Playback

MediaCentral Cloud UX supports playback of a variety of video formats registered by MediaCentral Production Management and residing on Avid shared storage. MCUX decodes the source format and streams images and sound to the MediaCentral Cloud UX client.

MediaCentral playback capacity is limited by one of two factors:

- *CPU bound*: after a certain number of playback streams, the server has no more CPU cycles left
- *I/O bound*: after a certain number of streams, the server's network bandwidth becomes saturated

Different source formats have different CPU-decode profiles, and different I/O footprints. Typically: low bit rate source formats are CPU bound; high-bit rate source formats are I/O bound.

The other factor that determines whether a source format is CPU or I/O bound is the network connection, which could be 1 Gb or greater.

Media Format and Stream Count Assessment

To determine the number of users you can support, you need to know which media formats are in use, as the server can support a certain number of concurrent playback streams per format.

Some notes about the following two tables:

- The HP DL360p Gen8 server is used as an example in both tables. For comparison, the first table provides values for this server when populated with the Intel Xeon E5-2650 v1 (**Sandy Bridge**) CPUs. The second table provides information on many of the same formats with the server populated with Intel Xeon E5-2650 v2 (**Ivy Bridge**) CPUs.
- Stream counts with green shading indicate a CPU bound limit (the server is using its full compute capacity).
- Stream counts with orange shading indicate an I/O bound limit (the server can process more streams, but is limited by the 1 Gb network connection).
- 100+ Mbps formats are not supported (NS) over a 1 Gb connection to Avid shared storage, as not enough streams can be processed to be cost effective.
- Information on some formats was not available (NA) at time of publication.

Intel Xeon Sandy Bridge (v1) CPU

Format	Web Client	
	1 Gb	10 Gb
DNxHD 80-145; DVCPRO-HD	NS	16
AVC Intra 100	NS	10
AVC Intra 50	10	10
Avid JFIF 1:1	NA	27
Avid JFIF 2:1/3:1	NA	90
Avid JFIF 4:1/8:1/15:1	NA	190
Avid JFIF 10:1/20:1	NA	124
DNX 36-45, XDCAM HD 50	12	24
XDCAM EX 35, IMX50	16	42
XDCAM HD 17.5/35	18	36
DV50	12	56
DV 25; IMX 30/40	20	42
Proxy H.264	120	120
Proxy H.263	80	80

Intel Xeon Ivy Bridge (v2) CPU

Format	Web Client	
	1 Gb	10 Gb
AVC Intra 50	10	15
AVC Intra 100	NS	14
Avid JFIF 2:1/20:1	NA	110
DNxHD 145	NS	20
DNxHD 220x	NS	16
DNxHD 100	NS	22
DNX 45	12	24
DV 25	30	85
DV50	12	53
XDCAM EX 35	16	40
IMX 30/40	28	68
IMX 50	28	70
XDCAM HD 17.5/35	18	40
XDCAM HD 50	12	34
Proxy H.264	120	120
Proxy H.263	80	95

Intel Xeon Haswell (v3) and Broadwell (v4) CPU

For stream counts on supported MediaCentral Cloud UX servers equipped with Intel Xeon Haswell and Broadwell CPUs, reference the “Intel Xeon Ivy Bridge (v2) CPU” table. The stream count tests conducted for XAVC and AVC-ULTRA resolutions below used servers equipped with Haswell and Broadwell CPUs. See the table below for details.

Sony XAVC and Panasonic AVC-ULTRA LongG Support

The following tables detail XAVC and AVC-ULTRA playback support for MCUX users. Each row lists the server, processor type, and network connection speed used to complete the testing.

Sony XAVC

Server Type	25	35	50	25	35	50	50	50
	1080i / 59.94	1080i / 59.94	1080i / 59.94	1080i / 50	1080i / 50	1080i / 50	720p / 50	720p / 59.94
HP DL360 Gen9, v4 E5-2683 / 2.1ghz / 16 core, 10gige	4*	2*	1*	5*	2*	1*	29*	27*

* Frame rate not guaranteed. Frame rate might temporarily be reduced during playback.

Panasonic AVC Ultra

Server Type	12	25	50	12	25	50	12	25	50
	1080i / 59.94	1080i / 59.94	1080i / 59.94	1080i / 50	1080i / 50	1080i / 50	1080p / 29.97	1080p / 29.97	1080p / 29.97
HP DL360 Gen8, v2 E5-2670 / 2.5ghz / 10 core, 10gige	6	4	2	13	9	6	11	9	4
HP DL360 Gen9, v3 E5-2650L / 1.8ghz / 12 core, 10gige	3	3	1	11	8	3	6	5	1
HP DL360 Gen9, v4 E5-2683 / 2.1ghz / 16 core, 10gige	10	7	4	24	17	8	NA	NA	NA

Additional resolutions:

Server Type	12	25	50	12	25	50	12	25	50
	1080p / 25	1080p / 25	1080p / 25	720p / 50	720p / 50	720p / 50	720p / 59.94	720p / 59.94	720p / 59.94
HP DL360 Gen8, v2 E5-2670 / 2.5ghz / 10 core, 10gige	17	11	4	20	11	6	25	11	6
HP DL360 Gen9, v3 E5-2650L / 1.8ghz / 12 core, 10gige	12	9	2	16	7	3	19	8	3
HP DL360 Gen9, v4 E5-2683 / 2.1ghz / 16 core, 10gige	NA	NA	NA	27	14	9	30	18	9

DNxHR Support

The following table lists the number of playback streams for a single server using DNxHR resolutions. The following numbers were collected using a single HP DL360 Gen 8 with a 2.5ghz V2 processor connected to Avid NEXIS through a 10 Gb connection.

As these resolutions are system intensive, Avid recommends using proxy versions of each of the following formats instead of the full high-resolution media to optimize the user experience.

DNXHR LB UHD 25fps	DNXHR SQ UHD 25fp	DNXHR HQ UHD 25fps	DNXHR HQx UHD 25fp	DNXHR LB UHD 29.97fps	DNXHR SQ UHD 29.97fp	DNXHR HQ UHD 29.97fps
16	5	3	2	15	5	2

DNXHR HQx UHD 29.97fp	DNXHR LB UHD 50fp	DNNHR SQ UHD 50fps	DNNHR HQ UHD 50fp	DNNHR HQx UHD 50fp	DNXHR LB UHD 59.94fps	DNXHR SQ UHD 59.94fps
2	8	1	1	1	7	1

DNXHR HQ UHD 59.94fps	DNXHR HQx UHD 59.94fp	DNXHR LB UHD 60fp	DNXHR SQ UHD 60fp	DNXHR HQ UHD 60fp	DNXHR HQx UHD 60fps
1*	1*	8	1	1*	1*

* Frame rate not guaranteed. Frame rate might temporarily be reduced during playback.

Sample Server Calculation

This section provides an example of how you might determine the number of required MediaCentral Cloud UX servers for your organization.

Peak Usage Assessment

To determine the number of servers you need to support your deployment of MediaCentral Cloud UX, you need to know how many users (at peak) are expected to be working with each media format in use. For example:

- 20 MediaCentral Cloud UX users of DNxHD 145 (no proxy)
- 40 MediaCentral Cloud UX users of XDCAM 50 (no proxy)
- 75 MediaCentral Cloud UX users of H.264 800 Kbps proxy

Overhead Assessment

To determine the number of servers you need, some overhead must be accounted for:

- There is a constant overhead of 0.25 servers to run non-playback services, followed by the servers needed to run the total number of users for each format.
- If high-availability is required, add two (2) additional servers.

Final Assessment

You make the final assessment by bringing in all previous assessments together. For example, given the following data:

- 10 Gb network connection to Avid shared storage
- Constant 25% server overhead (.25)
- 20 MediaCentral Cloud UX users of DNxHD 145 (no proxy) @ 16 streams/server (20/16)
- 40 MediaCentral Cloud UX users of XDCAM 50 (no proxy) @ 24 streams/server (40/24)
- 75 MediaCentral Cloud UX users of H.264 800 Kbps proxy @ 100 streams/server (75/100)
- Plus 2 servers for redundancy

You make the following calculation:

$$x = .25 + \frac{20}{16} + \frac{40}{24} + \frac{75}{100} + 2$$

which means...

$$x = .25 + 1.25 + 1.67 + .75 + 2$$

which means...

$$x = 6 \text{ servers}$$

Avid recommends rounding up to ensure capacity. This method also provides some additional overhead in case of over-subscription or if a minimal number of additional users are added.

If your workflow includes Media Composer Cloud Remote clients, you must add those clients to your calculations.

Determining Scale: Media Composer Cloud Remote


The Media Composer Cloud Remote option allows editors using Media Composer to remotely playback media from and upload media to a facility, enabling Media Composer users the freedom to work from everywhere. If the editor wishes to combine assets located in the remote Production Management database (stored on Avid shared storage), the MediaCentral Cloud UX server is used to stream the assets to the remote Media Composer client. Media Central Cloud UX is a required component for any Media Composer Cloud Remote workflow.

Media Composer Cloud Remote clients are often added to existing MediaCentral Cloud UX environments, making them a single component of a larger equation. Once you have determined the number of servers needed to support your Media Composer Cloud Remote clients, make sure to add this number to your [“Sample Server Calculation” on page 15](#).


Sequence Complexity

Similar to the scale assessment for MediaCentral Cloud UX, the number of streams and users has a direct effect on the number of servers required to support the workflow. Additionally, as sequences created in Media Composer are often more complex than those created in MediaCentral Cloud UX, you must also account for this added complexity when determining scale for Media Composer Cloud Remote workflows.

Consider the following Media Composer sequence as an example:

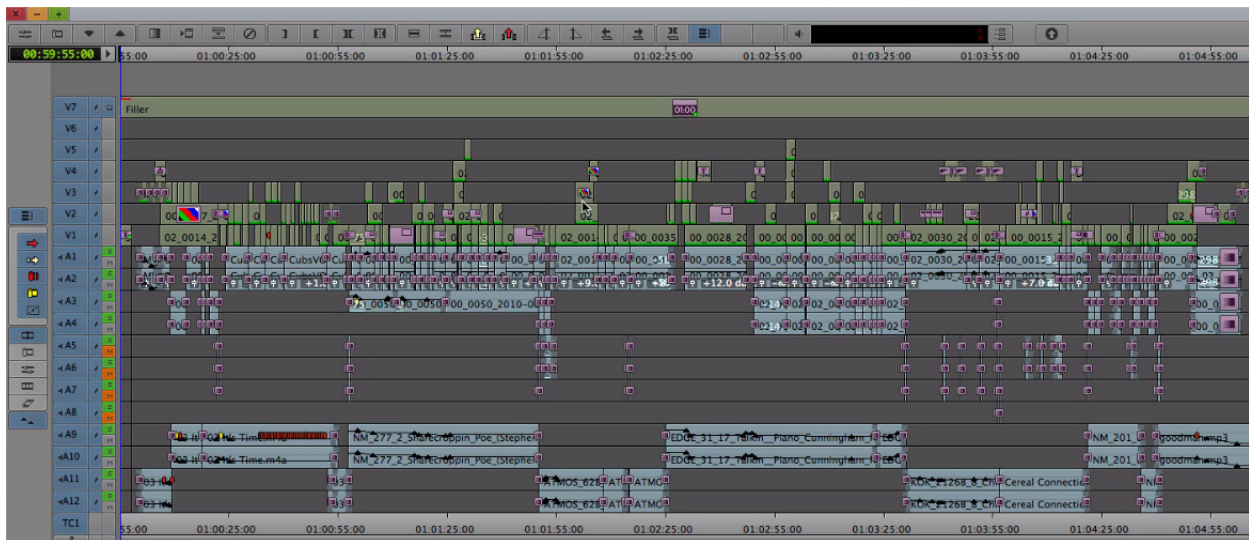

This sequence consists of approximately 980 edit segments. A *segment* is defined as a portion of a sequence between two clip transitions. For example, the following illustration shows a portion of the sequence containing three individual segments:



Using the sequence shown above, Avid determined that a single Avid MediaCentral Cloud UX server was capable of servicing 8 simultaneous users playing back approximately 200 segments per minute of a high resolution 1080 raster HD format (ex. AVC-Intra 100 1080i 59.94).

The server used in these tests included the following components:

- Intel(R) Xeon(R) CPU E5-2683 v4 @ 2.10GHz
- 128GB of RAM
- 10 Gb connection to Avid NEXIS shared storage

These performance numbers listed above assume that at the time of playback, no media was cached on the Media Composer client. If media has already been cached, additional users, streams, or segments might be possible.

As detailed in the [“Media Format and Stream Count Assessment”](#) on page 12, different resolutions affect the capabilities of the system. Higher bandwidth formats such as AVC-Intra 100 might be limited by the network while lower bandwidth formats such as Proxy H.264 might be limited by the capabilities of the CPU.

Avid Qualified Servers

Avid has performed specific and extensive testing on the servers included in this section. Product descriptions and part numbers have been added (where available).



This document provides HP and Dell part numbers for each item as a reference. Part numbers may change without notification. Consult the manufacturer directly for updated information.

Refer to the following sections for details on specific servers:

- [HP ProLiant DL360 Gen10](#)
- [HP ProLiant DL360 Gen9](#)
- [HP ProLiant DL360p Gen8](#)
- [Dell PowerEdge R640](#)
- [Dell PowerEdge R630](#)
- [Dell PowerEdge R620](#)

HP ProLiant DL360 Gen10

Avid has qualified the HP DL360 Gen10 server for use with MediaCentral Cloud UX. This 1U form factor server provides enough expansion for NICs and drives to suit all MCUX deployments.

For more information on this server, see the following link: <https://www.hpe.com/us/en/product-catalog/servers/proliant-servers/pip.hpe-proliant-dl360-gen10-server.1010007891.html>

DL360 Gen10 Hardware Requirements

The following table presents the minimum server specifications:

Item	Qty	Part Number	Component	Description
1	1	867959-B21	Product	DL360 Gen10 8SFF Configure-to-order (CTO) Server
2	1	860687-L21	Processors	DL360 Gen10 Xeon-G 6130 FIO Kit
3	1	860687-B21		DL360 Gen10 Xeon-G 6130 Kit
4	4	815100-B21	Memory	32GB 2Rx4 PC4-2666V-R Smart Kit
5	2	765453-B21	1st and 2nd hard drive (OS + applications)	1TB SATA 7.2K SFF SC 512e DS HDD
6	8	872477-B21	Drives (media cache)	600GB SAS 10K SFF SC DS HDD
7	1	869083-B21	RAID controller	Smart Array P816i-a SR G10 LH Ctrlr
8	1	875241-B21	Smart Storage Battery	96W Smart Storage Battery 145mm Cbl
9	2	AF556A	Power Cord	1.83m 10A C13-UL US Pwr Cord
10	1	665240-B21	Flexible LOM options	Ethernet 1Gb 4-port 366FLR Adapter
11	1	867966-B21	Backplane (motherboard)	DL360 Gen10 2SFF SAS/SATA Bkpln

Item	Qty	Part Number	Component	Description
12	2	865414-B21	Power Supply	800W FS Plat Ht Plg LH Pwr Sply Kit
13	1	874543-B21	Rail Kit	1U Gen10 SFF Easy Install Rail Kit

Additional Notes:

- Not listed: Avid added a 10GB Myricom network adapter when connecting to Avid shared storage.
- **Item 4:** The server must be configured with 4x32GB RAM DIMMs or better. Using smaller DIMM sizes could adversely affect system performance.
- **Items 5 and 6:** The first two drives are configured in RAID 1 and host the operating system and MCS software installation. All remaining drives are configured in a RAID 5 as a media file cache. For more information, see “[Caching and HDD Requirements](#)” on page 6.
- **Item 10:** This HP Ethernet 1 Gb 4-port 331FLR adapter (network interface card) cannot be used with Avid shared storage! If you are purchasing servers to configure MCS for use with MediaCentral connected to one or more Avid shared storage systems, substitute the HP Ethernet 1 Gb 4-port 366FLR FIO adapter instead.
- **Item 12:** The power cord indicated is standard for North America, Central America, parts of South America, and other countries. Please ensure you specify the correct power cord for your particular geographical region.

HP ProLiant DL360 Gen9

Avid has qualified the HP DL360 Gen9 server for use with MediaCentral Cloud UX. This 1U form factor server provides enough expansion for NICs and drives to suit all MCUX deployments.

For more information on this server, see the following link: <http://www8.hp.com/us/en/products/proliant-servers/product-detail.html?oid=7252836>

DL360 Gen9 Hardware Requirements

The following table presents the minimum server specifications:

Item	Qty	Part Number	Component	Description
1	1	755258-B21	Product	HP ProLiant DL360 Gen9 8-SFF Configure-to-order (CTO) Server
2	1	764101-L21	Processors	HP DL360p Gen9 E5-2650Lv3 (1.8GHz/12-core/30MB/65W) FIO (Factory Installation Option) Processor Kit
3	1	764101-B21		HP DL360p Gen9 E5-2650Lv3 (1.8GHz/12-core/30MB/65W) Processor Kit
4	16	726718-B21	Memory	HP 8 GB (1x8 GB) Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit
5		766205-B21	Storage controller ^a	HP DL360 Gen9 Smart Array P840 SAS Card with Cable Kit
6	--	--	Drive cage	HP 8-Bay Small Form Factor Drive Cage

Item	Qty	Part Number	Component	Description
7		764630-B21	Additional drive cage (optional, but recommended)	HP DL360 Gen9 2SFF SAS/SATA Universal Media Bay Kit
8	2	652745-B21	1st and 2nd hard drive	HP 500 GB 6G SAS 7.2K rpm SFF (2.5in) SC Midline 1 yr Warranty Hard Drive
9	6 or 8	652572-B21	Drives (cache) ^b	HP 450 GB 6G SAS 10K SFF (2.5-inch) SC Enterprise 3 yr Warranty HDD
10	-- --		RAID setting	None. Do not specify a RAID setting when ordering. RAID is configured during software installation.
11		665240-B21	Flexible LOM options / upgrades ^c	HP Ethernet 1 Gb 4-port 366FLR (Flexible LOM form factor) FIO (Factory Installed Option) adapter
12	2	720479-B21	Power Supply	HP 800W Flex Slot Platinum Hot Plug Power Supply Kit
13	2	AF556A	Power Cord	HP C13 - Nema 5-15P US/CA 110V 10Amp 1.83m Power Cord
14	1	663201-B21	Rail Kit	HP 1U Small Form Factor Ball Bearing Rail Kit

- a. Includes the P840 Smart Array controller with 4 GB integrated cache, HP Smart Storage Battery, and associated cabling to attach it to a 10 SFF configuration
- b. The procurement of additional HDDs for caching depends on deployment and media formats. See [“Caching and HDD Requirements”](#) on page 6.
- c. For non-Avid shared storage connections, you can substitute the following adapter instead: HP Ethernet 1 Gb 4-port 331FLR (Flexible LOM form factor) FIO (Factory Installation Option) Adapter (part # 684208-B21)

Additional Notes:

- **Item 4:** If you plan to enable settings in MediaCentral Cloud UX permitting playback at higher image quality you might need to configure more memory than indicated in the body of the table.
- **Items 6 and 7:** The DL360 supports up to 10 internal drives. The included drive cage provides space for up to eight internal HDDs. The additional drive cage (764630-B21) replaces the optical drive bay to accommodate two more HDDs.



Avid highly recommends ordering the additional drive cage and two additional HDDs for increased storage capacity.

- **Items 9 and 10:** The first two drives are configured in RAID 1 and host the operating system and MCUX software installation. All remaining drives are configured in a RAID 5 as a media file cache. For more information, see [“Caching and HDD Requirements”](#) on page 6.
- **Item 11:** This HP Ethernet 1 Gb 4-port 331FLR adapter (network interface card) cannot be used with Avid shared storage! If you are purchasing servers to configure MCUX for use with MediaCentral connected to one or more Avid shared storage systems, substitute the HP Ethernet 1 Gb 4-port 366FLR FIO adapter instead.
- **Item 13:** The power cord indicated is standard for North America, Central America, parts of South America, and other countries. Please ensure you specify the correct power cord for your particular geographical region.

HP ProLiant DL360p Gen8

Avid has qualified the HP DL360P Gen8 server for use with MediaCentral Cloud UX. This 1U form factor server provides enough expansion for NICs and drives to suit all MCUX deployments.



This server is no longer available for purchase.

HP DL360p Gen8 Hardware Requirements

The following table presents the minimum server specifications:

Item	Qty	Part Number	Component	Description
1	1	666532-B21	Product	HP ProLiant DL360p Gen8 10-SFF Configure-to-order (CTO) Server
2	1	712726-L21	Processors	HP DL360p Gen8 Intel Xeon E5-2650 V2 (2.6GHz/8-core/20MB/95W) - FIO (Factory Installation Option) Processor Kit (Ivy Bridge)
3	1	712726-B21		HP DL360 Gen8 E5-2650 V2 (2.6GHz/8-core/20MB/95W) Processor Kit (Ivy Bridge)
4	16		Memory	HP 8 GB (1x8 GB) Single Rank x4 PC3-14900R (DDR3-1866) Registered CAS-13 Memory Kit
5			Storage controller ^a	HP Embedded P420i Smart Array controller
6			Drive cage	HP 10-Bay Small Form Factor Drive Cage
7	2	652745-B21	1st and 2nd hard drive	HP 500 GB 6G SAS 7.2K rpm SFF (2.5in) SC Midline 1 yr Warranty Hard Drive
8	6	652572-B21	Drives (cache)	HP 450 GB 6G SAS 10K SFF (2.5-inch) SC Enterprise 3 yr Warranty HDD
9			RAID setting	None. Do not specify a RAID setting when ordering. RAID is configured during software installation.
10		631679-B21	Storage Controller Upgrade	HP 1 GB P-series Smart Array Flash Backed Write Cache (FBWC)
11		684217-B21	Flexible LOM options/upgrades ^b	HP Ethernet 1 Gb 4-port 366FLR (Flexible LOM form factor) FIO (Factory Installed Option) adapter
12	2	512327-B21	Power Supply	HP 750W Common Slot Gold Hot Power Supply Kit
13	2	AF556A	Power Cord	HP C13 - Nema 5-15P US/CA 110V 10Amp 1.83m Power Cord
14	1	663201-B21	Rail Kit	HP 1U Small Form Factor Ball Bearing Gen8 Rail Kit

- a. Factory integrated models ship with a P420i Smart Array controller. HP 1 GB P-series Smart Array Flash Backed Write Cache (FBWC) upgrade option must be added.
- b. For non-Avid shared storage connections, you can substitute the following adapter instead: HP Ethernet 1 Gb 4-port 331FLR (Flexible LOM form factor) FIO (Factory Installation Option) Adapter (part # 684208-B21)

Additional Notes:

- **Items 2 and 3:** As of August 2013 the HP ProLiant DL360P Gen8 server also shipped with the Intel® Xeon® E5-2650 v2 (Ivy Bridge) processor. Previously it shipped with the E5-2650 Sandy Bridge based processor. The part numbers for the previous generation of processor and related memory are provided the table below. Both processors are supported.

Item	Qty	Part Number	Component	Description
2	1	654772-L21	Processors	HP DL360p Intel Xeon Gen8 E5-2650 (2.0GHz/8-core/20MB/95W) - FIO (Factory Installation Option) Processor Kit (Sandy Bridge)
3	1	654772-B21		HP DL360p Gen8 E5-2650 (2.0GHz/8-core/20MB/95W) Processor Kit (Sandy Bridge)

- **Item 4:** If you plan to enable settings in MediaCentral Cloud UX permitting playback at higher image quality you might need to configure more memory than indicated in the body of the table.
- **Item 7 and 8:** The DL360p supports up to 8 internal drives. 2 drives are required for the operating system (in a RAID 1 configuration). In some cases, additional drives may be required for file caching. See “[Caching and HDD Requirements](#)” on page 6.
- **Item 11:** This HP Ethernet 1 Gb 4-port 331FLR adapter (network interface card) cannot be used with Avid shared storage! If you are purchasing servers to configure MCUX for use with MediaCentral connected to one or more Avid shared storage systems, substitute the HP Ethernet 1 Gb 4-port 366FLR FIO adapter instead.
- **Item 13:** The power cord indicated is standard for North America, Central America, parts of South America, and other countries. Please ensure you specify the correct power cord for your particular geographical region.

Dell PowerEdge R640

Avid has qualified the Dell PowerEdge R640 server for use with MediaCentral Cloud UX. This 1U form factor server provides enough expansion for NICs and drives to suit all MCUX deployments.

For more information about this server, see the following link: <https://www.dell.com/en-ca/workshop/povw/poweredge-r640>

Dell PowerEdge R640 Hardware Requirements

The following table presents the minimum server specifications:

Item	Qty	Part Number	Component	Description
1	1	R640	PowerEdge R640	PowerEdge R640 Server
2	--	5098750	Motherboard	PowerEdge R640 Motherboard
3	--	NTPM	Trusted Platform Module	No Trusted Platform Module
4	1	5101048	Chassis Configuration	2.5" Chassis with up to 8 Hard Drives and 2PCIe slots, 2CPU only

Item	Qty	Part Number	Component	Description
5	1	5103402	Processor	Intel® Xeon® Silver 4114 2.2G, 10C/20T, 9.6GT/s, 14M Cache, Turbo, HT (85W) DDR4-2400
6	1	5103403	Additional Processor	Intel® Xeon® Silver 4114 2.2G, 10C/20T, 9.6GT/s, 14M Cache, Turbo, HT (85W) DDR4-2400
7	--	5099793	Processor Thermal Configuration	Standard Heatsink for 2 CPU
8	--	5099278	Memory DIMM Type and Speed	2666MT/s RDIMMs
	--	PEOPT	Memory Configuration Type	Performance Optimized
9	8	5098888	Memory Capacity	16GB RDIMM, 2666MT/s, Dual Rank
10	--	5098873	RAID Configuration	C4, RAID 5 for 3 or more HDDs or SSDs (Matching Type/Speed/Capacity)
11	--	5102586	RAID/Internal Storage Controllers	PERC H730P RAID Controller, 2GB NV Cache, Minicard
12	8	5103818	Hard Drives	600GB 10K RPM SAS 12Gbps 512n 2.5in Hot-plug Hard Drive
13	--	NOOS	Operating System	No Operating System
14	--	NOMED	OS Media Kits	No Media Required
15	--	5099556	Embedded Systems Management	iDRAC9,Enterprise
16	--	5100926	Group Manager	iDRAC Group Manager, Disabled
17	--	5101344	Password	iDRAC,Legacy Password
18	--	5099711	iDRAC Systems Management Options	Static IP
19	1	5098851	PCIe Riser	Riser Config 3,1x16 LP,1x16 FH
20	--	5101077	Internal Optical Drive	No Internal Optical Drive
21	8	5101073	Fans	Standard Fans for R640
22	1	495R	Power Supply	Dual, Hot-plug, Redundant Power Supply (1+1), 495W
23	2	125V10	Power Cords	NEMA 5-15P to C13 Wall Plug, 125 Volt, 15 AMP, 10 Feet (3m), Power Cord, North America
24	1	5099012	Bezel	Standard Bezel for x4 and x8 chassis
25	--	5101881	Quick Sync 2 (At-the-box mgmt)	No Quick Sync
26	--	HPBIOS	BIOS and Advanced System Configuration Settings	Performance BIOS Setting

Item	Qty	Part Number	Component	Description
27	--	UEFIB	Advanced System Configurations	UEFI BIOS Boot Mode with GPT Partition
28	1	RDYRL	Rack Rails	ReadyRails™ Sliding Rails Without Cable Management Arm

Additional Notes:

- Not listed: Avid added a 10GB network adapter to connect to Avid shared storage.
- **Item 23:** The power cord indicated is standard for North America, Central America, parts of South America, and other countries. Please ensure you specify the correct power cord for your particular geographical region.

Dell PowerEdge R630

Avid has qualified the Dell PowerEdge R630 server for use with MediaCentral Cloud UX. This 1U form factor server provides enough expansion for NICs and drives to suit all MCUX deployments.

For more information about this server, see the following link: <http://www.dell.com/ca/business/p/poweredge-r630/pd>

Dell PowerEdge R630 Hardware Requirements

The following table presents the minimum server specifications:

Item	Qty	Part Number	Component	Description
1	1	R630	Product	PowerEdge R630 Server, No TPM
2	--	103P	Chassis Configuration	Chassis with up to 10, 2.5" Hard Drives, 3 PCIe Slots
3	1	10523	Processors	Intel® Xeon® E5-2650 v3 2.3GHz,25M Cache,9.60GT/s QPI,Turbo,HT,10C/20T (105W)
4	1	A10523		Intel® Xeon® E5-2650 v3 2.3GHz,25M Cache,9.60GT/s QPI,Turbo,HT,10C/20T (105W)
5	1	HS1202	Processor Thermal Configuration	2 CPU up to 120W
6	--	--	PCIe Riser	None
7	--	R2133	Memory DIMM Type and Speed	2133MT/s DIMMs
8	--	AECC	Memory Configuration Type	Advanced ECC
	16	8G2R	Memory Capacity	8 GB RDIMM, 2133MT/s, Dual Rank, x8 Data Width
9	--	URH	RAID Configuration	Unconfigured RAID for H330/H730/H730P (1-24 HDDs or SSDs)
10	1	H7301G	Storage Controller ^a	PERC H730 RAID Controller, 1 GB NV Cache

Item	Qty	Part Number	Component	Description
11	8	600S10	Hard Drives	600 GB 10K RPM SAS 6 Gbps 2.5in Hot-plug Hard Drive
12	1	I350	Network Daughter Card	Intel Ethernet i350 QP 1 Gb Network Daughter Card
13	--	--	Additional Network Cards	No additional NIC cards
14	--	--	Host Bus Adapter/ Converged Network Adapter	No host bus adapter
15	--	--	Additional PCIe cards	No additional PCIe cards
16	1	I8EXP	Embedded Systems Management	iDRAC8 Express, integrated Dell Remote Access Controller, Express
17	--	--	Internal SD module	None
18	--	NODVD1	Internal Optical Drive	No internal optical drive
19	--	NOBEZL	Bezel	No bezel
20		RRCMA	Rack Rails	ReadyRails™ Sliding Rails With Cable Management Arm
21	--	HPBIOS	Performance BIOS Setting	Performance BIOS Setting
22	1	495R	Power Supply	Dual, Hot-plug, Redundant Power Supply (1+1), 495W
23	2	125V10	Power Cord	NEMA 5-15P to C13 Wall Plug, 125 Volt, 15 AMP, 10 Feet (3m), Power Cord, North America
24	--	--	Server Accessories	No server accessories
25	--	NODOCS	Systems Documentation	No systems documentation, no OpenManage DVD Kit
26	--	NOOS	Operating System	Operating System
27	--	--	Licenses	No licenses
28	--	NOMED	OS Media Kits	No Media Required
29	--	--	OS Partitions	None
30	--	--	Secondary OS	No secondary OS
31	--	--	Virtualization Software	None
32	--	--	Virtualization Licenses and Subscription	None
33	--	--	Enable Virtualization	None
34	--	--	Database Software	None

Item	Qty	Part Number	Component	Description
35	--	--	Client Access Licenses	No client access licenses
36	--	--	Additional Software Offerings	None
37	--	--	Advanced System Configurations	No advanced system configurations
38	--	--	System Management Upgrades	No system management upgrades
39	--	U3OS	Hardware Support Services	Avid does not have a specific recommendation. Select according to client needs.
40	--	--	Proactive Systems Management	None
41	--	NOINSTL	Installation Services	No installation
42	--	--	Proactive Maintenance	Proactive maintenance declined
43	--	NORCS	Remote Consulting Service	Declined Remote Consulting Service
44	--	--	Additional Installation Services	No additional installation services
45	--	--	Keep Your Hard Drive	None

a. PERC H730P RAID Controller, 2 GB NV Cache (optional)

Additional Notes:

- **Item 23:** The power cord indicated is standard for North America, Central America, parts of South America, and other countries. Please ensure you specify the correct power cord for your particular geographical region.

Dell PowerEdge R620

Although no longer available for purchase, this server continues to be supported.

- Dell PowerEdge R620 product page:
<http://www.dell.com/ca/business/p/poweredge-r620/pd>
- Dell Support Center:
<http://www.dell.com/support/home/us/en/04/Products/>

Legal Notices

Product specifications are subject to change without notice and do not represent a commitment on the part of Avid Technology, Inc.

This product is subject to the terms and conditions of a software license agreement provided with the software. The product may only be used in accordance with the license agreement.

This product may be protected by one or more U.S. and non-U.S patents. Details are available at www.avid.com/patents.

This guide is protected by copyright. This guide is for your personal use and may not be reproduced or distributed, in whole or in part, without permission of Avid. Reasonable care has been taken in preparing this guide; however, it may contain omissions, technical inaccuracies, or typographical errors. Avid Technology, Inc. disclaims liability for all losses incurred through the use of this document. Product specifications are subject to change without notice.

Copyright © 2018 Avid Technology, Inc. and its licensors. All rights reserved.

The following disclaimer is required by Apple Computer, Inc.:

APPLE COMPUTER, INC. MAKES NO WARRANTIES WHATSOEVER, EITHER EXPRESS OR IMPLIED, REGARDING THIS PRODUCT, INCLUDING WARRANTIES WITH RESPECT TO ITS MERCHANTABILITY OR ITS FITNESS FOR ANY PARTICULAR PURPOSE. THE EXCLUSION OF IMPLIED WARRANTIES IS NOT PERMITTED BY SOME STATES. THE ABOVE EXCLUSION MAY NOT APPLY TO YOU. THIS WARRANTY PROVIDES YOU WITH SPECIFIC LEGAL RIGHTS. THERE MAY BE OTHER RIGHTS THAT YOU MAY HAVE WHICH VARY FROM STATE TO STATE.

The following disclaimer is required by Sam Leffler and Silicon Graphics, Inc. for the use of their TIFF library:

Copyright © 1988–1997 Sam Leffler
Copyright © 1991–1997 Silicon Graphics, Inc.

Permission to use, copy, modify, distribute, and sell this software [i.e., the TIFF library] and its documentation for any purpose is hereby granted without fee, provided that (i) the above copyright notices and this permission notice appear in all copies of the software and related documentation, and (ii) the names of Sam Leffler and Silicon Graphics may not be used in any advertising or publicity relating to the software without the specific, prior written permission of Sam Leffler and Silicon Graphics.

THE SOFTWARE IS PROVIDED "AS-IS" AND WITHOUT WARRANTY OF ANY KIND, EXPRESS, IMPLIED OR OTHERWISE, INCLUDING WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

IN NO EVENT SHALL SAM LEFFLER OR SILICON GRAPHICS BE LIABLE FOR ANY SPECIAL, INCIDENTAL, INDIRECT OR CONSEQUENTIAL DAMAGES OF ANY KIND, OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER OR NOT ADVISED OF THE POSSIBILITY OF DAMAGE, AND ON ANY THEORY OF LIABILITY, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

The following disclaimer is required by the Independent JPEG Group:

This software is based in part on the work of the Independent JPEG Group.

This Software may contain components licensed under the following conditions:

Copyright (c) 1989 The Regents of the University of California. All rights reserved.

Redistribution and use in source and binary forms are permitted provided that the above copyright notice and this paragraph are duplicated in all such forms and that any documentation, advertising materials, and other materials related to such distribution and use acknowledge that the software was developed by the University of California, Berkeley. The name of the University may not be used to endorse or promote products derived from this software without specific prior written permission. THIS SOFTWARE IS PROVIDED "AS IS" AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

Copyright (C) 1989, 1991 by Jef Poskanzer.

Permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation. This software is provided "as is" without express or implied warranty.

Copyright 1995, Trinity College Computing Center. Written by David Chappell.

Permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation. This software is provided "as is" without express or implied warranty.

Copyright 1996 Daniel Dardailler.

Permission to use, copy, modify, distribute, and sell this software for any purpose is hereby granted without fee, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of Daniel Dardailler not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission. Daniel Dardailler makes no representations about the suitability of this software for any purpose. It is provided "as is" without express or implied warranty.

Modifications Copyright 1999 Matt Koss, under the same license as above.

Copyright (c) 1991 by AT&T.

Permission to use, copy, modify, and distribute this software for any purpose without fee is hereby granted, provided that this entire notice is included in all copies of any software which is or includes a copy or modification of this software and in all copies of the supporting documentation for such software.

THIS SOFTWARE IS BEING PROVIDED "AS IS", WITHOUT ANY EXPRESS OR IMPLIED WARRANTY. IN PARTICULAR, NEITHER THE AUTHOR NOR AT&T MAKES ANY REPRESENTATION OR WARRANTY OF ANY KIND CONCERNING THE MERCHANTABILITY OF THIS SOFTWARE OR ITS FITNESS FOR ANY PARTICULAR PURPOSE.

This product includes software developed by the University of California, Berkeley and its contributors.

The following disclaimer is required by Paradigm Matrix:

Portions of this software licensed from Paradigm Matrix.

The following disclaimer is required by Ray Sauers Associates, Inc.:

"Install-It" is licensed from Ray Sauers Associates, Inc. End-User is prohibited from taking any action to derive a source code equivalent of "Install-It," including by reverse assembly or reverse compilation, Ray Sauers Associates, Inc. shall in no event be liable for any damages resulting from reseller's failure to perform reseller's obligation; or any damages arising from use or operation of reseller's products or the software; or any other damages, including but not limited to, incidental, direct, indirect, special or consequential Damages including lost profits, or damages resulting from loss of use or inability to use reseller's products or the software for any reason including copyright or patent infringement, or lost data, even if Ray Sauers Associates has been advised, knew or should have known of the possibility of such damages.

The following disclaimer is required by Videomedia, Inc.:

"Videomedia, Inc. makes no warranties whatsoever, either express or implied, regarding this product, including warranties with respect to its merchantability or its fitness for any particular purpose."

"This software contains V-LAN ver. 3.0 Command Protocols which communicate with V-LAN ver. 3.0 products developed by Videomedia, Inc. and V-LAN ver. 3.0 compatible products developed by third parties under license from Videomedia, Inc. Use of this software will allow "frame accurate" editing control of applicable videotape recorder decks, videodisc recorders/players and the like."

The following disclaimer is required by Altura Software, Inc. for the use of its Mac2Win software and Sample Source Code:

©1993–1998 Altura Software, Inc.

The following disclaimer is required by 3Prong.com Inc.:

Certain waveform and vector monitoring capabilities are provided under a license from 3Prong.com Inc.

The following disclaimer is required by Interplay Entertainment Corp.:

The "Interplay" name is used with the permission of Interplay Entertainment Corp., which bears no responsibility for Avid products.

This product includes portions of the Alloy Look & Feel software from Incors GmbH.

This product includes software developed by the Apache Software Foundation (<http://www.apache.org/>).

© DevelopMentor

This product may include the JCifs library, for which the following notice applies:

JCifs © Copyright 2004, The JCIFS Project, is licensed under LGPL (<http://jcifs.samba.org/>). See the LGPL.txt file in the Third Party Software directory on the installation CD.

Avid Interplay contains components licensed from LavanTech. These components may only be used as part of and in connection with Avid Interplay.

Portions © Copyright 2003-2007 of MOG Solutions.

Attn. Government User(s). Restricted Rights Legend

U.S. GOVERNMENT RESTRICTED RIGHTS. This Software and its documentation are "commercial computer software" or "commercial computer software documentation." In the event that such Software or documentation is acquired by or on behalf of a unit or agency of the U.S. Government, all rights with respect to this Software and documentation are subject to the terms of the License Agreement, pursuant to FAR §12.212(a) and/or DFARS §227.7202-1(a), as applicable.

Trademarks

Avid, the Avid Logo, Avid Everywhere, Avid DNXHD, Avid DNXHR, Avid Nexis, AirSpeed, Eleven, EUCON, Interplay, iNEWS, ISIS, Mbox, MediaCentral, Media Composer, NewsCutter, Pro Tools, ProSet and RealSet, Maestro, PlayMaker, Sibelius, Symphony, and all related product names and logos, are registered or unregistered trademarks of Avid Technology, Inc. in the United States and/or other countries. The Interplay name is used with the permission of the Interplay Entertainment Corp. which bears no responsibility for Avid products. All other trademarks are the property of their respective owners. For a full list of Avid trademarks, see: <http://www.avid.com/US/about-avid/legal-notices/trademarks>.

Footage

WCAU Fire Story — Courtesy of NBC-10, Philadelphia, PA.

News material provided by WFTV Television Inc.

Avid MediaCentral Cloud UX Hardware Guide • Revised March 25, 2019 • This document is distributed by Avid in online (electronic) form only, and is not available for purchase in printed form.